

V_S30 METHOD





Overview

Shear-wave velocity, V_S , is an important parameter for evaluating dynamic behavior of soil. V_S averaged over the top 30m of soil is referred to as V_{S30} . Both the *NEHRP Provisions* and the *Uniform Building Code* use V_{S30} to classify sites according to type of soil for earthquake engineering design.

The new V_{S30} method is a simplification of the Spectral Analysis of Surface Waves (SASW) method. It provides only a single number for the average shear-wave velocity in the top 30m. The simplified method is based on the correlation between Rayleigh-wave phase velocity and V_{S30} , as shown at left.

Procedure

Only the phase velocity of a 40m long Rayleigh wave, V_{R40} , is needed to estimate V_{S30} , so the standard SASW testing procedure is modified. Only one receiver spacing is used, instead of an expanding spread. The field setup is shown below.

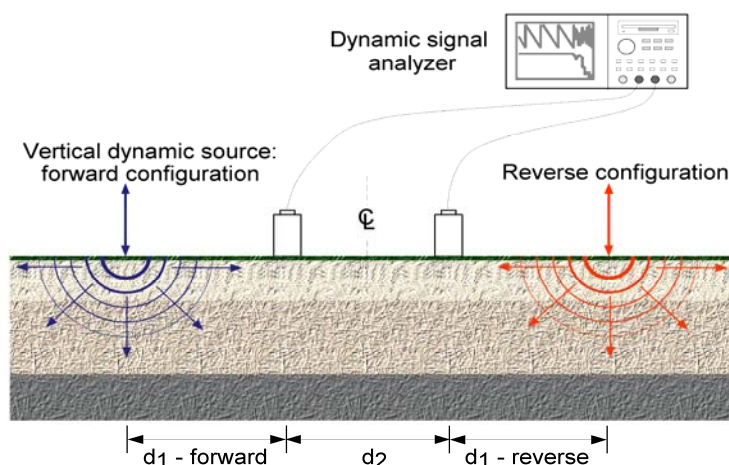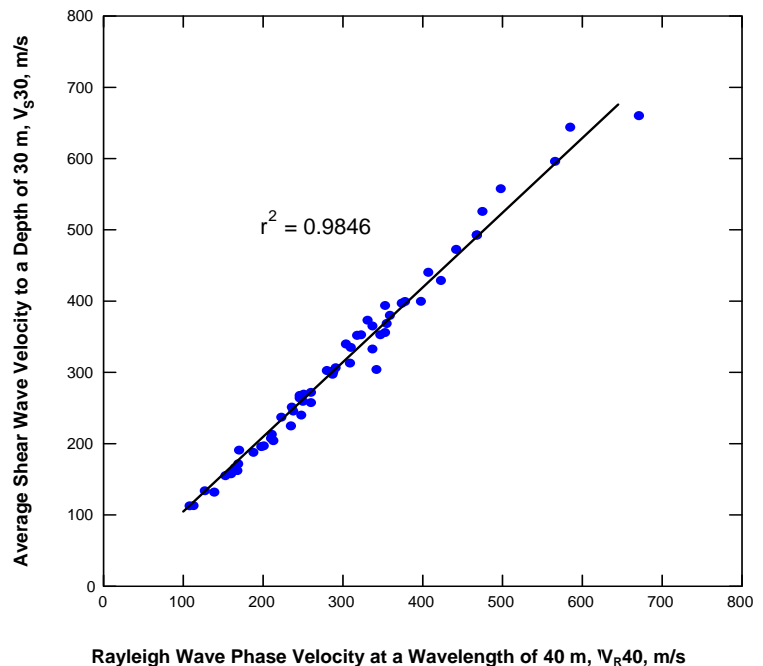

A dynamic source on the surface generates Rayleigh waves, which are monitored by a pair of geophones. After V_{R40} is calculated from the phase difference between the two geophones, an empirical predictive equation is applied to estimate V_{S30} . The accuracy of the estimate is $\pm 10\%$.

Key Benefits

The new V_{S30} method is non-invasive and nondestructive. It is a promising, cost-efficient alternative to borehole measurements for V_{S30} . The method is simple, robust, and can be performed quickly, making it an ideal standard engineering test. Applications include site characterization and seismic hazard mapping. It could be used for a detailed characterization of a large site in order to focus a drilling program.